


## Toepassingsmogelijkheden Green Series

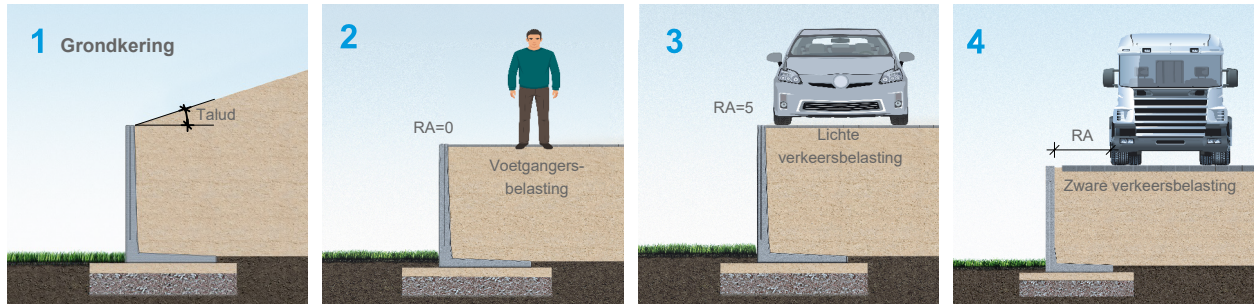

Wandtype	Belastingtype 1 Grondkering met talud	Belastingtype 2 Voetgangersbelasting (2kN/m <sup>2</sup> )	Belastingtype 3 Lichte verkeersbelasting (5kN/m <sup>2</sup> )	Belastingtype 4 Zware verkeersbelasting (20kN/m <sup>2</sup> )
	Max. Talud (°)	RA	RA	RA
LG050	32,5°	0cm	5cm	5cm
LG050200	32,5°	0cm	5cm	5cm
LG075	32,5°	0cm	5cm	20cm
LG075200	32,5°	0cm	5cm	20cm
LG100	6°	0cm	5cm	85cm
LG100200	6°	0cm	5cm	85cm
LG050HAK	32,5°	0cm	5cm	5cm
LG050200HAK	32,5°	0cm	5cm	5cm
LG075HAK	32,5°	0cm	5cm	20cm
LG075200HAK	32,5°	0cm	5cm	20cm
LG100HAK	6°	0cm	5cm	85cm
LG100200HAK	6°	0cm	5cm	85cm

Voor overige toepassingen: neem contact op met onze afdeling verkoop.

Grondparameters:	1800kg/m <sup>3</sup> h.i.w. 32,5°
Ondergrondparameters:	1900kg/m <sup>3</sup> h.i.w. 35°
RA:	Randafstand
Geen beton of stabilisatiezand benodigd	